







# Derun Lighting Technology Co., LTD

[www.derunledlights.com](http://www.derunledlights.com)

Email: [info@derunledlights.com](mailto:info@derunledlights.com)

## Bendable LED Strip Light

DR-2835FXB60-12X

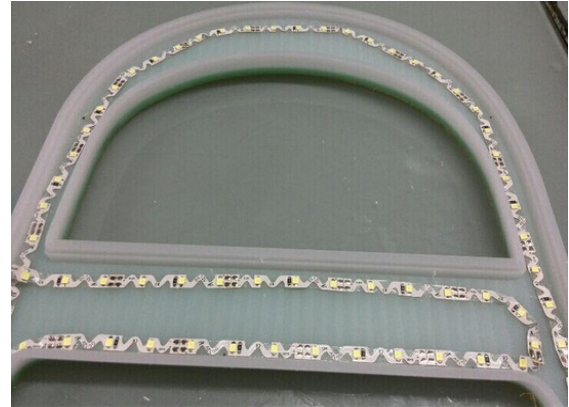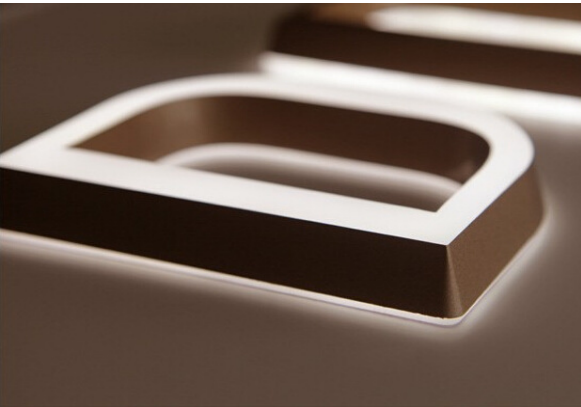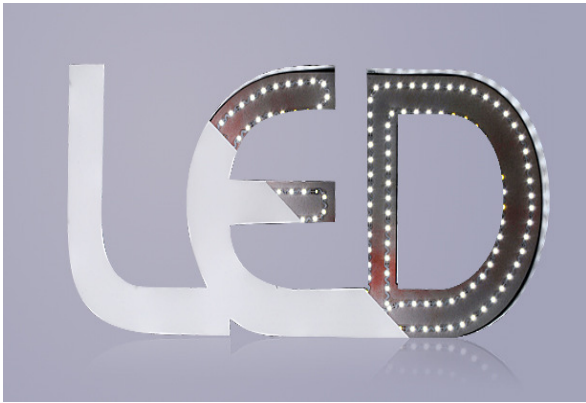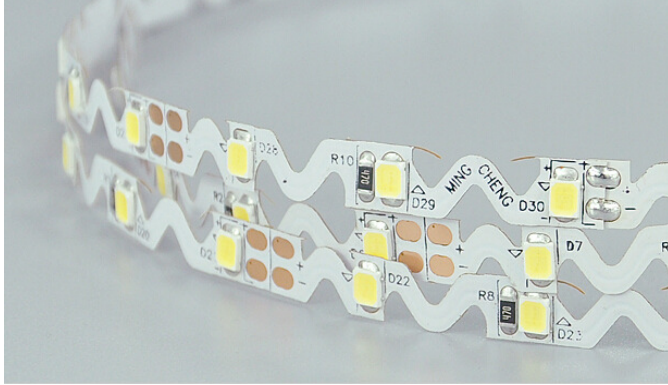

## Features:

- ◆ wide applicability, easy to install and maintain.
- ◆ very flexible, easily be curved to any shape.
- ◆ extremely luminous, with wide viewing angle.
- ◆ energy saving and environmental conservation, long lifespan.
- ◆ various colors available.

## Application:

- ◆ indoor decoration lighting.
- ◆ large scale backlight.
- ◆ window display lighting.
- ◆ building contour decorative lighting
- ◆ ad.signs

## Cautions:

- ◆ Linear separable LED strip on flexible printed circuit board with self-adhesive back.
- ◆ Each unit of 3 LEDs can be cut out as a regular segment without damaging the rest ribbon.
- ◆ The connector is being upgraded.
- ◆ We will keep customers informed.

## Electrical/Optical Characteristics:

Part No.	Color	Operating Voltage	LED Quantity/m	Length	$\lambda$ /TCC	LED Spacing	Power Dissipation/m
DR-2835FX60-12R	Red	DC12V	60	5m	620-625 nm	16.7mm	12W
DR-2835FX60-12Y	Yellow	DC12V	60	5m	585-595 nm	16.7mm	12W
DR-2835FX60-12G	Green	DC12V	60	5m	510-525 nm	16.7mm	12W
DR-2835FX60-12B	Blue	DC12V	60	5m	460-465 nm	16.7mm	12W
DR-2835FX60-12W	White	DC12V	60	5m	6000-6500K	16.7mm	12W
DR-2835FX60-12WW	Warm white	DC12V	60	5m	2800-3200K	16.7mm	12W

- ※ PCB Size: 5000mm\*6mm
- ※ LED Quantity: 60leds/m
- ※ Working Voltage: 12V
- ※ Power: 12W/M
- ※ Lumen: 22-24LM per led
- ※ PCB Color: White
- ※ Viewing angle: 120 degree
- ※ Waterproof: IP20 Non-waterproof
- ※ Tape: 3M adhesive tape on the back
- ※ Package: 5M/ROLL with Anti-static Bag
- ※ Certification: CE, ROHS, UL Listed
- ※ Warranty: 3 Years

## Note:

- Ø Prohibit to use this product in excess of the operating voltage (DC12V) 5%.
- Ø Non-waterproof products, and the working environment humidity is less than 60%.
- Ø Don't add reverse voltage at both ends of the product.
- Ø Products using indoor environment (not waterproof) is -40 ° C ~ 85 ° C, it would not work outside such environment
- Ø No weights extrusion, excessive meander.
- Ø Life span is 50000h.
- Ø Standard length: 5 meters/reel or 8 meters/reel.
- Ø Ribbon width: 12mm

Ø Printed circuit board thickness: 0.25mm.

## Assembly information

Ø Solder connection should only be performed on designated solder pads(marked"+/-),During soldering, don't exceed the maximum soldering time of 10 seconds and the maximum soldering temperature of 260 Celsius degrees.

Ø The smallest unit (50mm or 100mm-3LEDS) can be removed by cutting with scissors between the designated

Ø The mounting of the ribbon is facilitated by means of the double-sided adhesive on the back-surface of the ribbon, Care must be taken to provide a clean and dry mounting surface, free of oils or silicone coatings as well as dirt

Ø The minimum bending radius is 2cm.The ribbon may by bent over a smaller radius of the circuit board contained no Electronic components and such bends should be made once and fixed in position to avoid cyclic fatigue.

## Safety information

Ø The SMD light ribbon itself and all its components may not be mechanically stressed.

Ø Assembly must not damage or destroy conducting paths on the circuit board.

Ø Installation of LED modules (with power supplies) need to be made with regard to all applicable electrical and safety standards. Only qualified personel should be allowed to perform installations.

Ø Correct electrical polarity needs to be observed, Wrong polarity may destroy the ribbon.

Ø Parallel connection is highly recommended as safe electrical operation mode, Serial connection is not recommended, Unbalanced voltage drop can cause hazardous overload and damage the ribbon.

Ø Please ensure that the power supply is of adapters power to operate the total load.

Ø When mounting on metallic or otherwise conductive surfaces, there needs to be an electrical isolation points between ribbon and the mounting surface.

Ø Pay attention to standard ESD precautions when installing the ribbon.

Ø Damaged by corrosion will not be honored as a materials defect claim, it is the user's responsibility to provide suitable protecton against corrosive agents such as moisture and condensation and other harmful elements.

## Package & Shipping:

